VERSION 0.6.7 · 19 OCTOBER 2026

Lumen

A native Windows shell around WebView2, written in Rust, built to keep memory low.

What it is so far, what it measures, and where it goes next.

19.9 MB
idle, Lumen itself

91 MB
one Wikipedia tab

1.1 GB
forty heavy tabs, asleep

48
tools for AI agents

Measured on one laptop, release builds, private working set. Against Brave on the same pages: see the Performance section.

Get it

`lumen-0.6.7-setup.exe` installs Lumen for your user, no admin needed, with a Start menu entry. Or take `lumen-0.6.7-win64.zip`, unpack it anywhere and run `lumen.exe`; nothing to install. Windows 10 or 11, 64-bit. Lumen is not signed yet, so the first time Windows may say it protected your PC: click **More info**, then **Run anyway**. Lumen needs Microsoft WebView2, which Windows nearly always has; the installer fetches it if not, and Lumen says so if it is missing. Your things live in `%APPDATA%\Lumen`. Something wrong: `lumen.exe --doctor` checks the install and says what to fix, or Settings > About > Report a problem.

What it is


Lumen is a Windows program that shows web pages. It does not draw them. Pages are drawn by Microsoft WebView2, the Chromium-based engine already installed on every Windows 11 machine. Everything around the page is Lumen's own code: the window, the tabs, the sidebar, the content blocker, the downloads and the memory policy. That part is about 54,000 lines of Rust.

A page in Lumen costs about what the same page costs in any Chromium-based program, because it is the same engine. What Lumen controls is the rest: how heavy the shell is, how many renderer processes run, and what happens to pages you are not looking at. That is where the numbers below come from.


It is also a place for AI agents to work. Agents drive it over MCP, each in tabs and a profile of its own.

How it looks


Lumen draws its own window, so it can look like anything. Until 0.6.0 it looked like a settings dialog. Now it has three looks, and each is a whole set: colours, type, corners and motion. Pick one at first run, change it in Settings > Appearance.

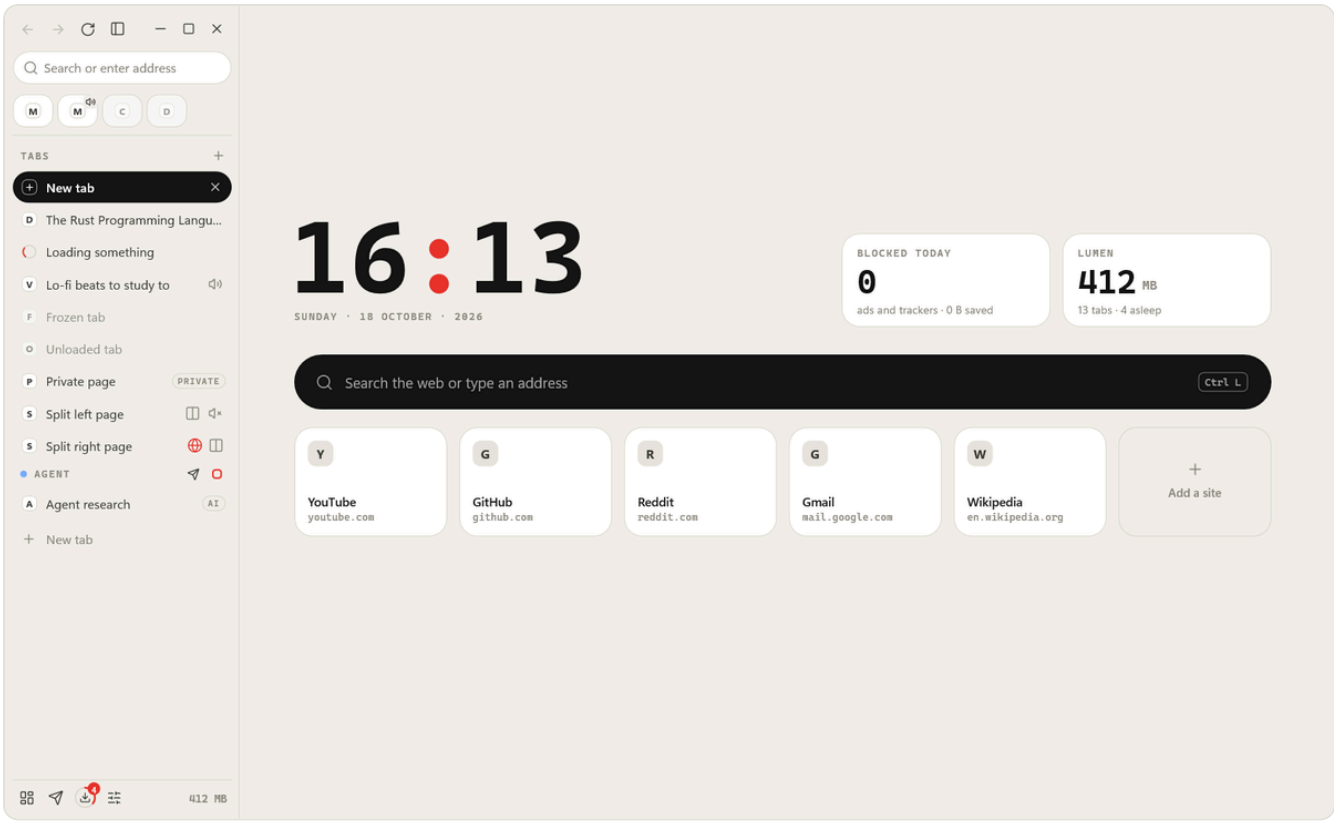


Signal is the default. Warm paper and black ink, labels in spaced monospace capitals, one red signal. Light and dark.

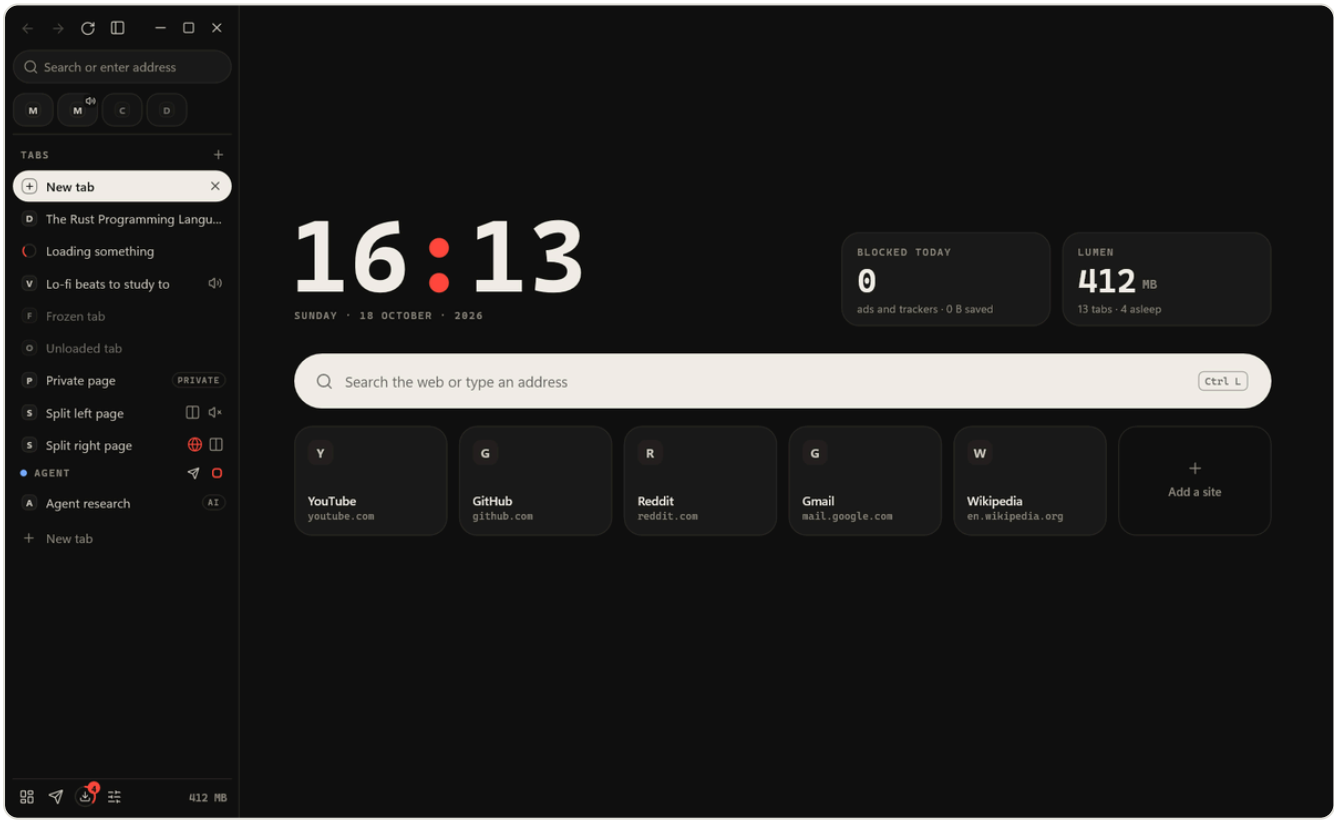

Glass is a frosted sidebar over a colour wallpaper, the page a floating card, light type, no monospace. **Precise** is near-black, hairlines, square-ish corners, one violet accent.

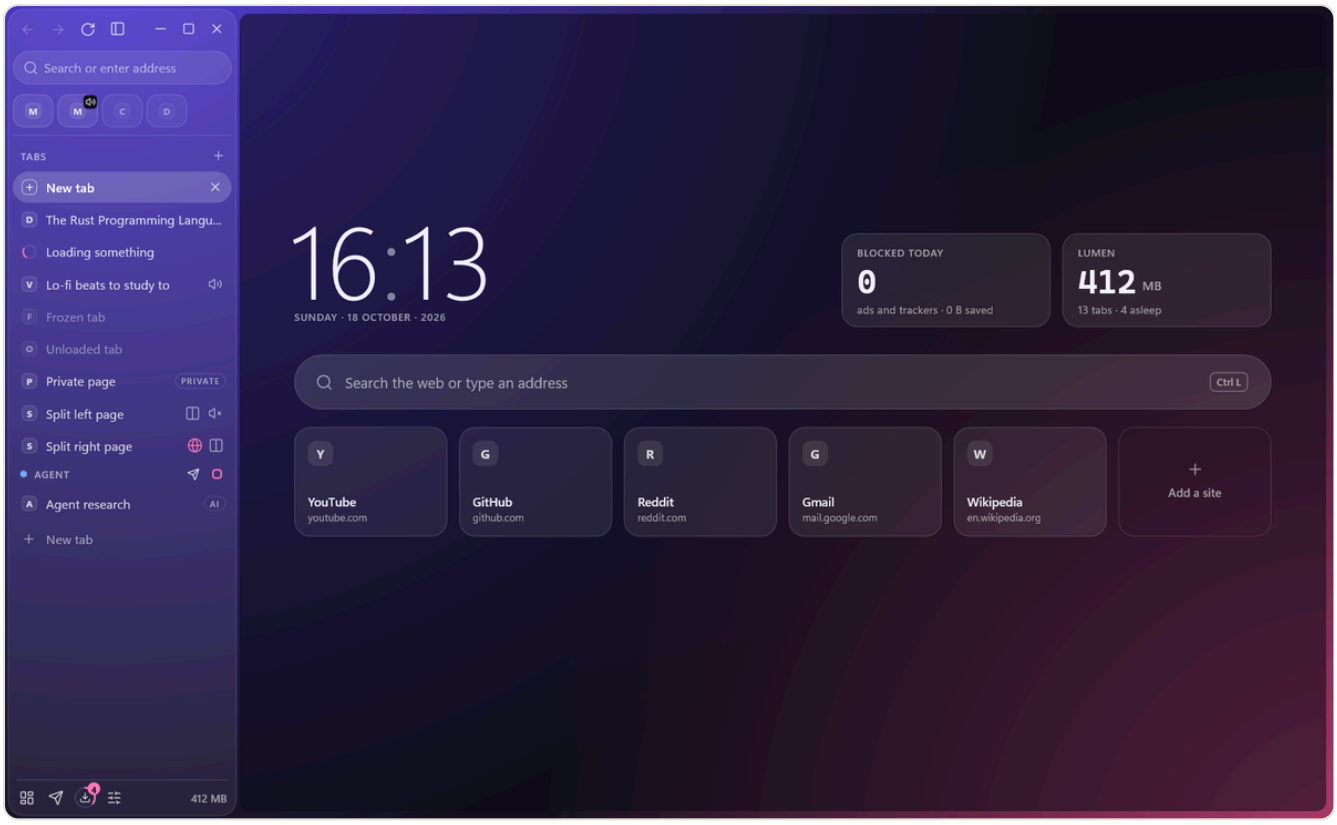


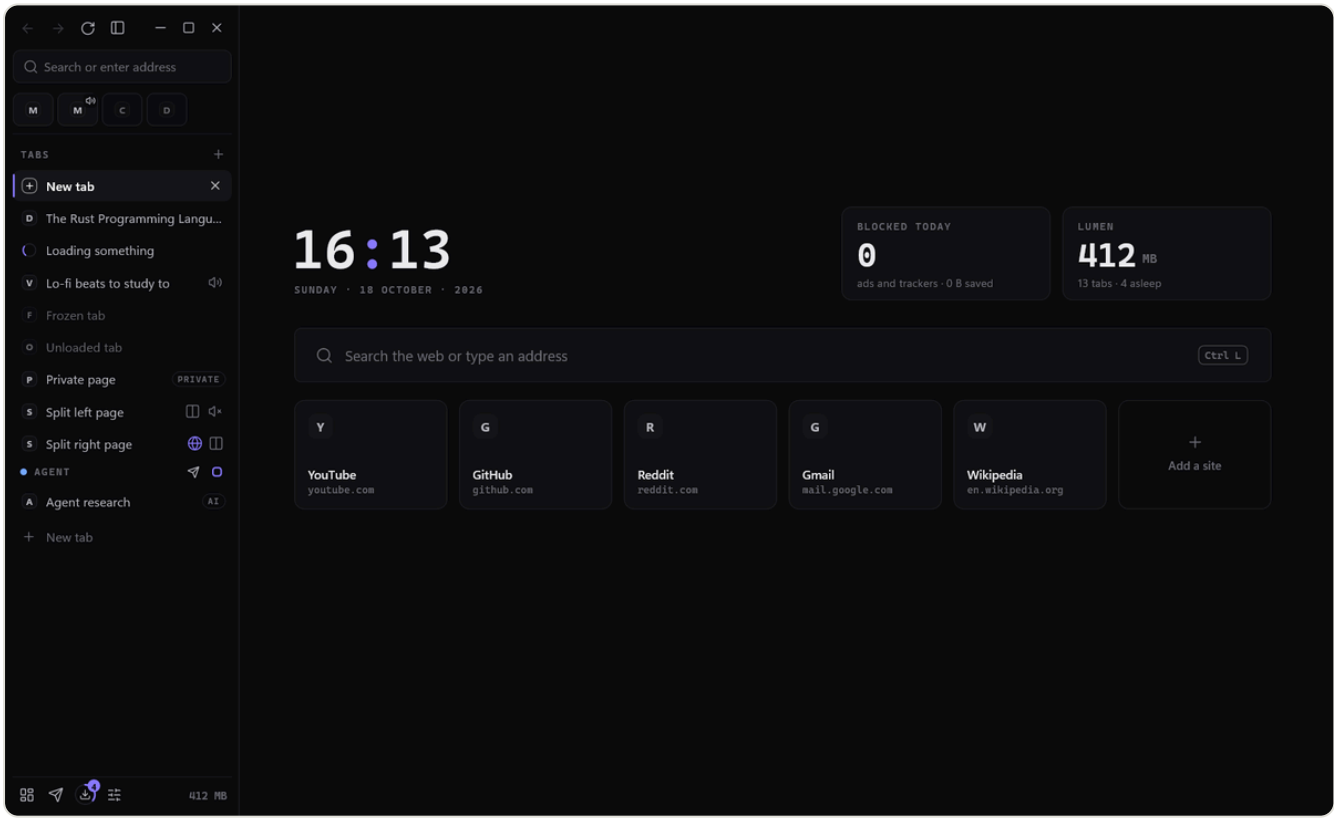

The rules all three keep:

- **One accent, one meaning.** The accent colour marks something live: a working agent, a running Drive, a download, the clock's colon. Nothing else gets it. Buttons, chosen options and the current tab are ink.
- **Cards.** Every page is cards on the ground: Settings, History, Downloads, Bookmarks, Site settings, Control, the Dashboard, the Privacy report, Drive. Every card that floats (tab search, the site card under the lock, address suggestions, an agent asking for you, a site asking for the camera, a message to an agent) is the same card.

- **Site icons**, kept on disk by site. A start-page tile without one asks that site for its own icon, once a run. No icon service ever sees the address.
- **Every layout.** Vertical (the sidebar), horizontal (a tab strip, like Chrome) and hybrid (the sidebar under a toolbar), compact or not, sidebar left or right. The page is a window of its own on top of Lumen's drawing, so a card that has to reach over it lifts Lumen's window above the page, cut down to its own strips and the card, and drops it back when the card closes.

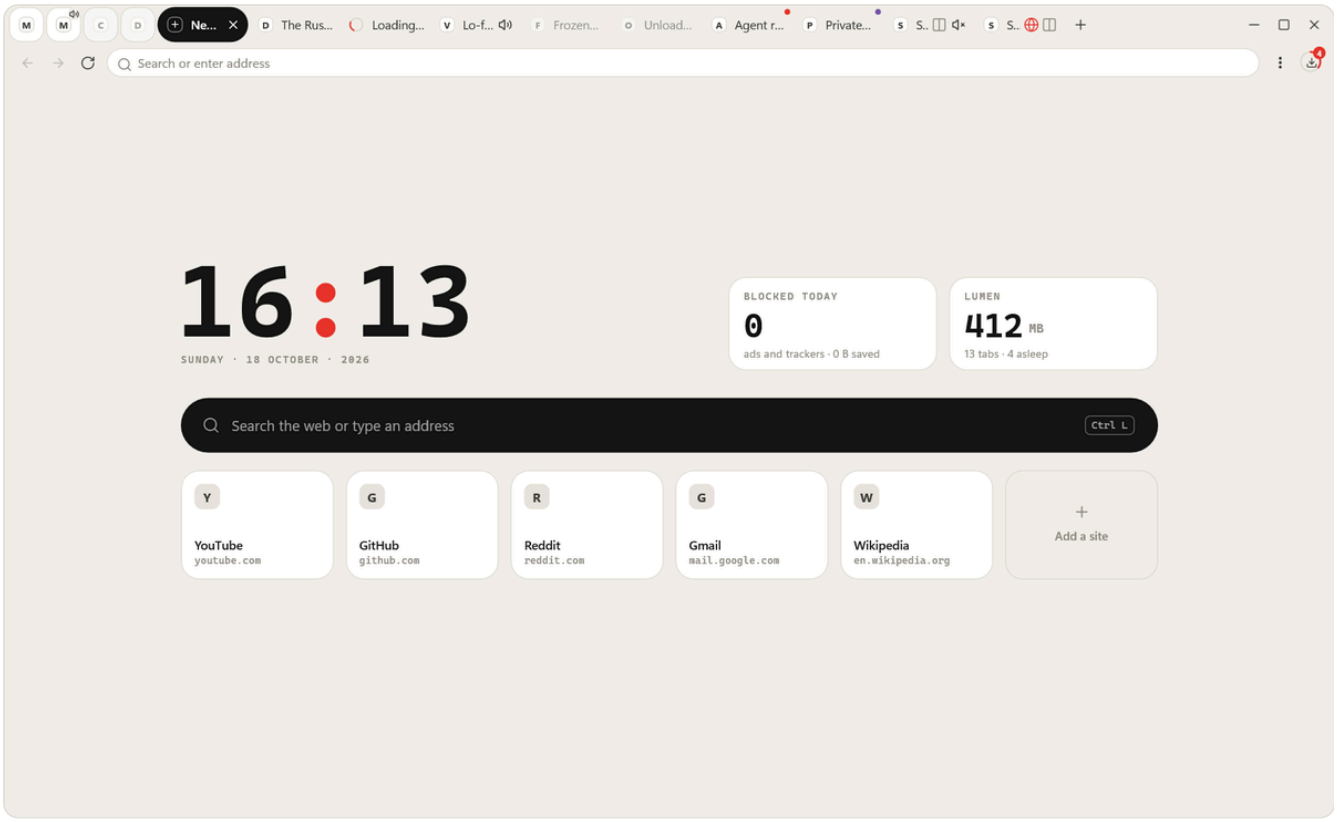

The design was drawn first, as a page of mockups, and approved before a line of it was built.

Spec

PART	DETAIL
Language	Rust 1.98, edition 2024
Runs on	Windows 10 and 11, x64
Page engine	Microsoft WebView2 (Chromium), through wry 0.57 and webview2-com 0.39
Window and interface	tao 0.37; every pixel drawn natively with Direct2D and DirectWrite, no HTML
Code	about 51,300 lines of Rust, one process for the shell
Binaries	`lumen.exe` 16.8 MB, `lumen-agent.exe` 2.1 MB (release, stripped); installer 7.6 MB
Tests	400 unit tests, plus live suites that drive a real headless Lumen
Content blocker	adblock-rust 0.13, EasyList, EasyPrivacy, uBlock lists; about 1.7 µs a request
Agent interface	MCP: an HTTP endpoint on localhost behind a token, and a stdio bridge; 48 tools
Scripts	Luau (sandboxed, through mlua), for scripts the person writes and agents run
Data	`%APPDATA%\Lumen` : settings, session, filters, history, the WebView2 profile

What it is built from, all pinned, anything that runs checked by SHA-256 before it runs:

PROJECT	WHAT IT DOES IN LUMEN	LICENSE
adblock-rust (Brave)	Blocks ads and trackers; hides leftovers with CSS	MPL-2.0
uBlock Origin 1.75.0 scriptlets	Strips ads out of YouTube's player data before the page reads it	GPL-3.0
EasyList, EasyPrivacy, uBlock lists	The rules: ads, trackers, cookie banners, tracking parameters	CC BY-SA / GPL
URLhaus and phishing filter lists	Malware and phishing hosts, refreshed weekly	MIT
Dark Reader 4.9.133	Dark pages for sites without a dark mode	MIT
Mozilla Readability 0.6.0, DOMPurify	Reader view, and article text for agents	Apache-2.0 / MPL-2.0
Bergamot	Page translation on the PC	MPL-2.0
aria2 1.37.0	Downloads with up to 16 connections, torrents	GPL-2.0
yt-dlp, FFmpeg	Saving the video on a page	Unlicense / GPL
wry, tao, windows-rs	The window, the WebView2 binding, every Win32 call	MIT / Apache-2.0

Performance

All numbers are measurements on one laptop: release builds, a throwaway profile, and Task Manager's "Memory" figure (private working set) unless a chart says otherwise.

Against Brave


Same laptop, same pages, both browsers fresh (a throwaway profile each), muted, each with its own blocking on (Brave's Shields, Lumen's blocker), and the number is the whole process tree of each: every renderer, the GPU process, the rest. Made by a script, `tools/vs_brave.py`, which comes with the source.

WHAT IS OPEN	LUMEN, YOU AWAY 15 S	LUMEN, YOU USING IT	BRAVE
Nothing (each browser's own start page)	36 MB	37 MB	151 MB
One Wikipedia article	49 MB	218 MB	192 MB
One YouTube video, playing	327 MB	653 MB	600 MB
Ten common sites, 90 s after opening	331 MB	706 MB	1,169 MB
The same ten, six and a half minutes later	124 MB	311 MB	1,111 MB

Brave was measured again beside each Lumen run, and its two runs differed by up to 10% (YouTube 553 MB and 600, ten sites 1,069 and 1,169). The table shows the run beside the first column; the cover pairs the in-use column with the run beside it.

The honest reading. Lumen's own part is small: with nothing open it is a quarter of Brave, because its interface is drawn natively and its start page needs no web engine at all. Many tabs is where it wins most, because tabs you are not looking at are trimmed at once, frozen after five minutes and unloaded after thirty. A single heavy page is a single heavy page: the engine is the same Chromium, and while you scroll and click it costs about what it costs in Brave. Fifteen seconds after your last click or key, the page on screen is told to keep only what it needs, and that is where the first column comes from; the next click or key gives it all back within a second.


The shell

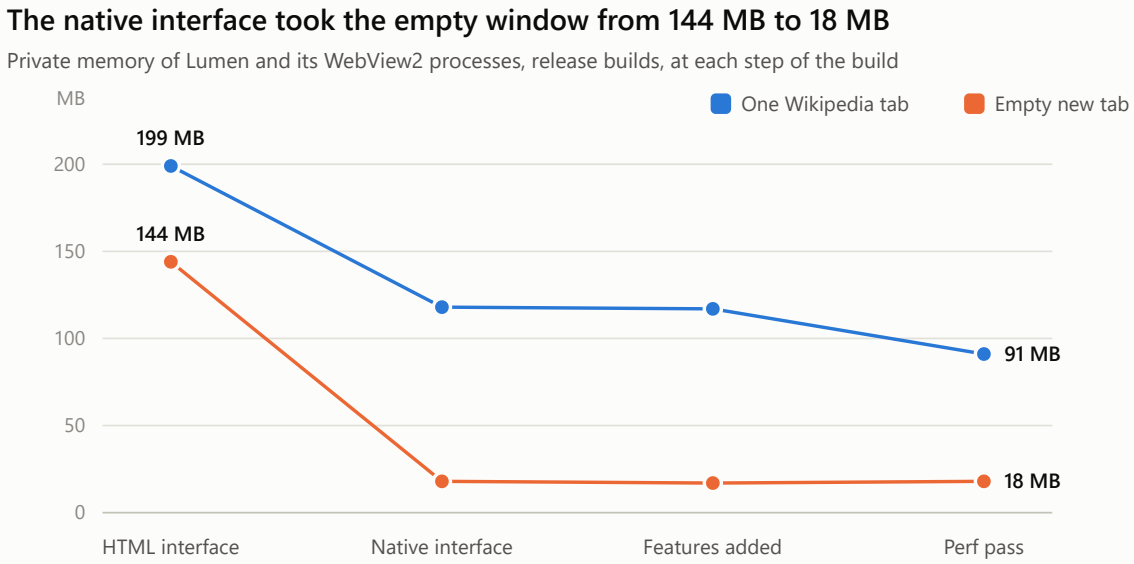

Replacing an interface written in HTML with one drawn natively took an empty window from 144 MB in five processes to 18 MB in one. A later pass on the event loop and on sleeping tabs took one Wikipedia tab from 117 MB to 91 MB, and its CPU from 0.47% to 0.16%.

STEP	EMPTY NEW TAB	ONE WIKIPEDIA TAB
HTML interface	144 MB	199 MB
Native interface	18 MB	118 MB
Features added	17 MB	117 MB
Perf pass	18 MB	91 MB


Idle

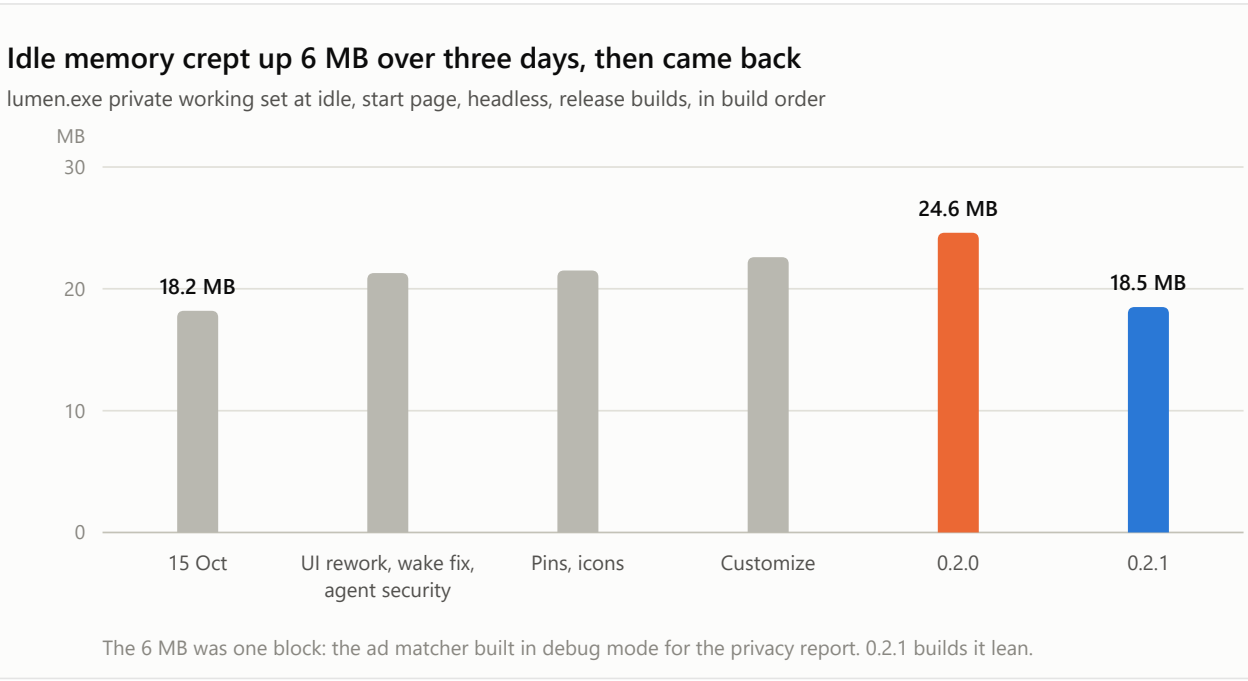

Idle memory crept up over three days of features. A count of the heap found almost all of the growth in one allocation: the content blocker's compiled rules, built in a debug mode that keeps every rule's text, only to tell an ad from a tracker in a report. 0.2.1 builds the rules lean and answers that question with a 380 KB table of tracker host hashes. The malware and phishing lists added in the same release hold 81,000 hosts the same way, for 0.5 MB. The redraw in 0.6 added three looks, cards, icons and floating cards, and idle went down, not up: 18.7 MB.


BUILD	IDLE
15 October	18.2 MB
UI rework, wake fix, agent security	21.3 MB
Pins, icons	21.5 MB
Customize	22.6 MB
0.2.0	24.6 MB
0.2.1	18.5 MB
0.4.0	19.2 MB
0.6.2, the redraw	18.7 MB

Many tabs

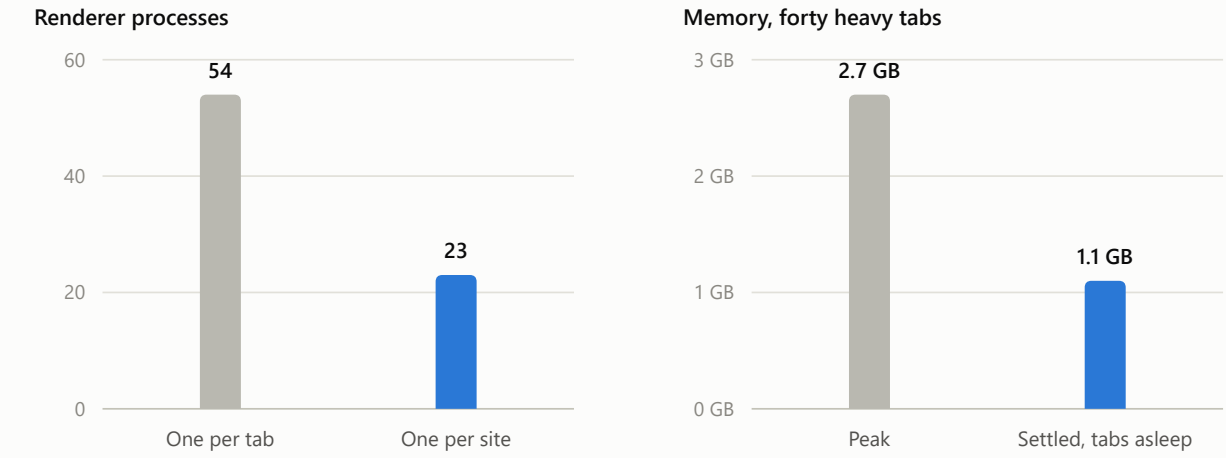

Two policies do this. One renderer per site instead of one per tab: forty tabs went from 54 renderer processes to 23, about 310 MB less. And tabs you are not looking at sleep: their caches are trimmed after 30 seconds, they freeze after 5 minutes and unload after 30. Forty heavy tabs peaked at 2.7 GB and settled at 1.1 GB, at 0.4% CPU.


Video, and one trade-off

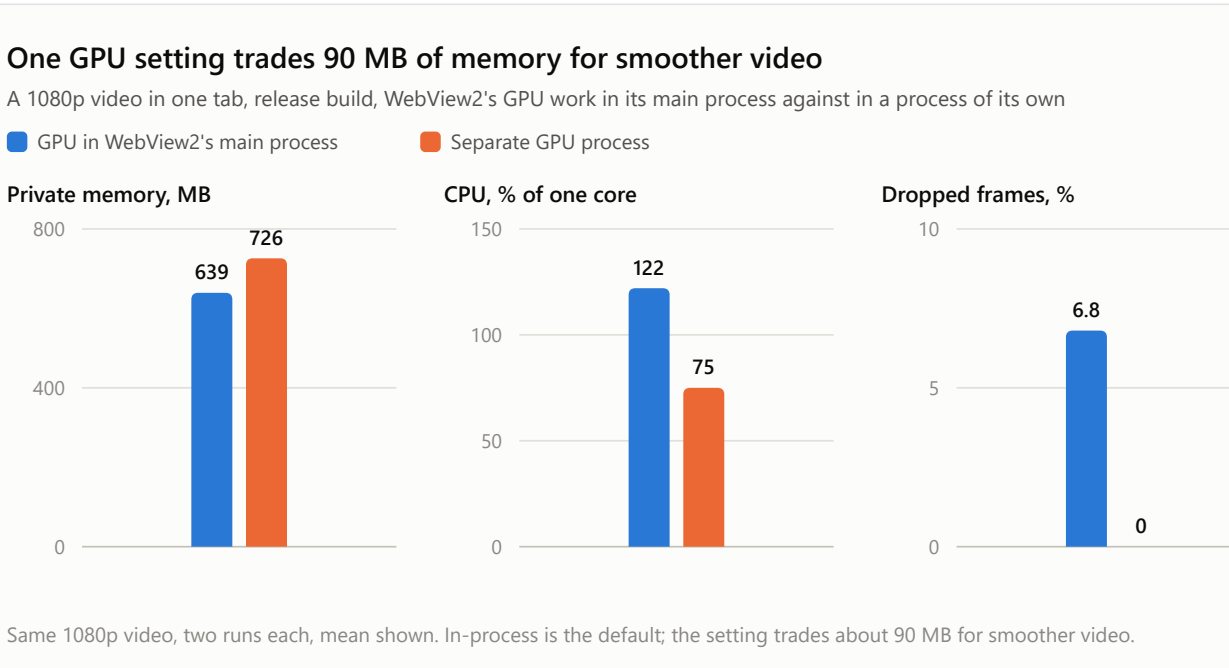

By default WebView2's GPU work runs inside WebView2's main process: one process and about 90 MB fewer. The cost shows in video: a 1080p video dropped 6 to 8% of its frames and used more CPU. A setting moves the GPU work back to its own process when smooth video matters more than memory.

	GPU IN WEBVIEW2'S MAIN PROCESS	SEPARATE GPU PROCESS
Private memory	639 MB	720 to 733 MB
CPU, one core	118 to 127%	70 to 80%
Dropped frames	5.8 to 7.8%	0%
Processes	8	10

Waking up

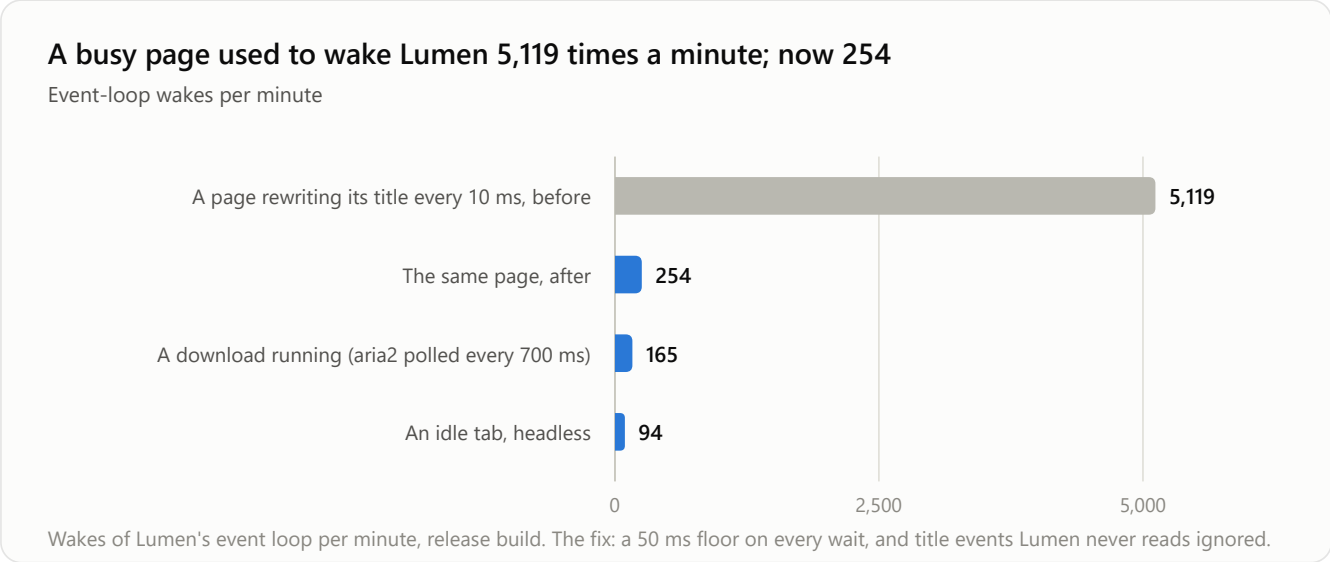

A page that rewrote its title every 10 ms woke Lumen's event loop 8,531 times in 100 seconds. Now the loop never waits for less than 50 ms, and it ignores events it never reads.

Other measured numbers

WHAT	NUMBER
One agent tab	about 85 MB
Agent tool call, a round trip to the window	0.7 ms (35 ms before 0.4.0)
Agent: fill and send a form, ten-step workflow	1.7 s and 2.6 s (5.7 s and 8.8 s before 0.4.0)
Agent: the ten-step workflow as a Luau script	1 call and 580 bytes back, against 12 calls and 4 KB
Content blocker, per request	about 1.7 µs
Usage journal, on against off	under 0.1% CPU, under 1 MB
CPU cap set to 50%	52% measured
Network cap set to 2048 KB/s	about 1,990 KB/s measured
A 100 MB download, before and after tuning aria2	17.8 s to 15.5 s mean (runs of the same build swung by 46%)
Servo, an experimental engine behind a build flag	renders Hacker News in 38 MB
Control's total against an outside measurement of the same moment	269 MB to 269

What it does

- Every piece of the interface is Lumen's own drawing, no stock Windows boxes: menus, forms, questions, the colour picker, file pickers, and a page's alerts, sign-ins, right-click menu and error page.
- Three looks (Signal, Glass, Precise), in vertical, horizontal or hybrid layouts. Colours, fonts, shapes, motion, clock and wallpaper can all be changed, and Settings has a search box.
- Content blocking for ads, trackers and cookie banners, on by default. The lock in the top bar opens the site card, with one switch that turns blocking off for that site alone; Settings > Site permissions lists every such site with a Reset on its row.
- Userscripts: `*.user.js` files in Lumen's data folder, with Chrome-style `@match` patterns, run in your own tabs only.
- Pop-ups blocked unless you clicked for them, and a page may not send you to another site on its own. A note says so, with **Allow** for that site; Settings > Privacy lists the sites you allow. Malware and phishing sites get a warning page.
- A privacy report of what was blocked and what was done, with trends. Only counts, no estimates.
- Lock a tab with Windows Hello (right-click it), or all of Lumen (Settings > Privacy). A locked tab shows nothing of itself until your face, finger or PIN opens it.
- Secret downloads: a finished download can move to a hidden folder that opens with Windows Hello. Hidden, not encrypted.
- New tabs can open private by default (Settings > Privacy).
- Reader view, dark pages, translation on the PC, read aloud.


- Downloads through aria2, torrents, saving the video on a page. A magnet you click starts at once; one a page starts on its own waits for you to press Resume.
- A PiP button on a tab that has sound, a now-playing card in the footer with pause and next, and the keyboard's media keys acting on the tab that is playing.
- Hidden tabs sleep: trimmed, then frozen, then unloaded, never one with sound or in a call (a microphone, camera or call link that is live, talking or not). When Windows runs short of memory, the hidden tab looked at longest ago goes first. A hidden tab over 500 MB unloads after 5 minutes. Freeze and unload times are yours to set, up to Never. On battery, battery saver makes the chrome move less; a leaf in the footer says so.
- Hover a tab and it says what it costs; one over 500 MB shows it all the time.
- The address bar fills in the site you go to most as you type: `yout`, Enter, YouTube.
- Control (Shift+Esc) says what each tab costs right now: memory, CPU and network, and below them Lumen's own drawing, the shared browser processes and the download helper. The total is every process under Lumen, the number Task Manager gives and the one in the Brave comparison; the readout in the sidebar is the same walk. The tab you came from keeps its full memory while you look, so it is measured as it is in use, not shrunk by the looking. Network is averaged over five seconds, because pages fetch in bursts. Caps for RAM, CPU and bandwidth sit under the table. The dashboard puts the same live numbers on tiles, with tabs, downloads and what was blocked today.
- History you can search by what a page said.
- Pins, bookmarks with folders and import, a speed dial, workspaces, split view, tab search. A pin remembers the page it was made on: wander off and one click takes it home. Essentials are icons above the tabs, the same in every workspace. Each workspace can have its own colour.
- The sidebar can hide until the mouse reaches the edge, and slide in over the page. The compact sidebar shows the memory number; past 1 GB it warms to red.
- Tabs nobody opened for a while can close themselves into an archive, under History. Off at first (Settings > Performance), because a half-filled form is not noticed yet. Ten heavy sites went from 709 MB to 237 MB. Pins, Essentials, playing, private and agent tabs are never archived.
- Ctrl+K opens a command palette over the sidebar: type and pick a command, a setting, an open tab, a bookmark or a page from history. Esc or a second Ctrl+K puts it away.
- KeePass logins filled from a `.kdbx` file, kept in memory only, locked after 10 minutes.
- Can be set as Windows' default for web links.
- A usage journal on the PC (memory, CPU, slow sites, crashes) that sends nothing anywhere.
- Settings > About: what's new (the changelog, built in, a card per version), a problem report you read in full and send with one press, and who made Lumen. After a crash, the start page offers that report once.

For AI agents

Any agent on the machine can drive Lumen through MCP: Claude Code, opencode, Codex, Cursor. One program, `lumen-agent`, connects them. It finds Lumen and its token by itself, so an agent's config holds a path, never a secret.

- An agent sees a page as a snapshot: every heading and control, each with a short ref like `e5`. It clicks and types by ref, with real input events.
- Every agent gets its own tabs and its own profile, with its own cookies and storage. One agent cannot see another's tabs, and none can see yours unless you lend one. In a tab you lent, you see the agent's cursor glide to each click with its name, and a pill with **Stop**.

- When a login, a captcha or a payment needs a person, the agent hands the tab over and waits.
- `lumen.exe --headless` runs Lumen off-screen: no focus, no taskbar button, no sound.
- Drive: type a task, press Run, and Lumen starts an agent CLI on it. The page shows the steps in plain words ("going to amazon.com", "typing ...") with how long each took, and what the agent says beside them.

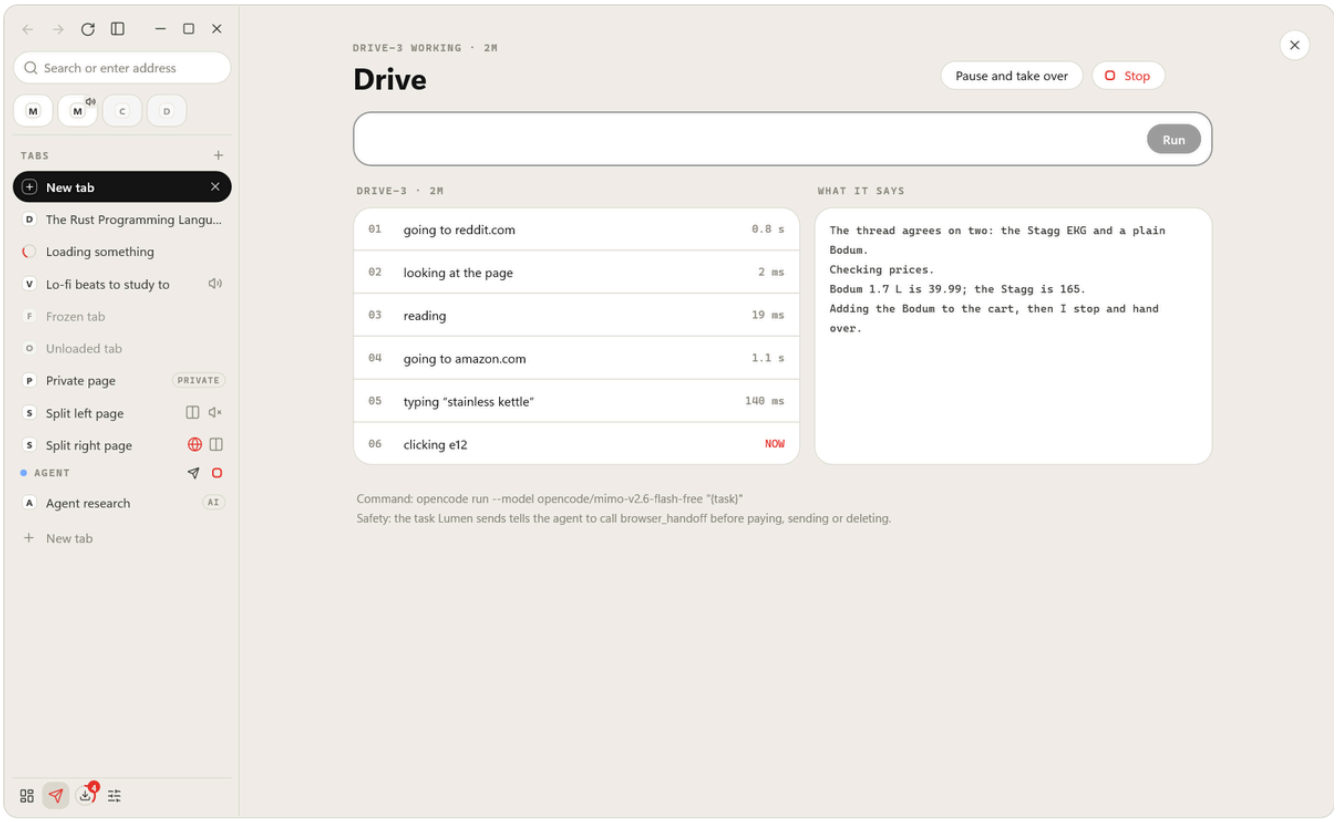

- Agent tabs live on a stage: a window of their own, off every screen, where Chromium still counts them as visible. Clicks land, and nothing comes to the front. Click an agent's tab to watch it live; the agent keeps working.
- Replies say what happened: a failed page's HTTP status, what a click changed or that it changed nothing. Page text is fenced, so a page cannot pose as the person.
- Fewer calls: `browser_batch` (up to 20 calls in one), `browser_fill` (a whole form), `browser_table`, `browser_extract` (a repeating list as JSON), `browser_links`. And Luau scripts: the person puts `.luau` files in a folder, agents list and run them. Every call a script makes is checked as if the agent made it.

The first real test, on 18 October, found reading fast and clicking broken: in a background tab a click did nothing and still answered "clicked". 0.3.0 fixed that with the stage, 0.4.0 made every call faster.

The plan

In order. Each step ships as its own version, with a line in the changelog (Settings > About > What's new).

1. **Honest replies and a smoke test.** A failed page says its HTTP status. A click says what it changed, or that nothing changed. Page text is marked as page text, so a page cannot pose as the person. Before every release, a live test clicks real buttons. Done in 0.3.0.
2. **The agent stage.** Agent tabs live in a window of their own, off every screen. WebView2 sees them as visible, so clicks land, and nothing comes to the front. Done in 0.3.0.

3. **Watching.** Click an agent's tab to see its live page, with the agent's own cursor in the accent colour. Your mouse cannot knock it off. Done in 0.5.0.
4. **Talking to an agent.** A text field to steer an agent now, queue its next task, or start a new one. Done in 0.5.0.
5. **Speed for agents.** Fewer calls and smaller replies: batches of steps, Luau scripts, and higher-level tools for forms and tables. Done in 0.4.0. Snapshots send only what changed (`diff`), and a ref keeps working while its element is in the page.
6. **Headless trims.** Measure first, then cut what an off-screen Lumen still does for nobody.
7. **The comparison.** Started in 0.6.7.2: Lumen against Brave, above, with the method in `tools/vs_brave.py` . Chrome and Edge next.
8. **An installer.** Done in 0.6.7: per user, no admin, WebView2 fetched when missing. Still to come: signed, so Windows does not warn about an unknown publisher, and updates that arrive by themselves.
9. **Source.** The code is meant to be published, later. Its license follows from what it bundles: uBlock's scriptlets are GPL-3.0.

Next to think through with the person, before anything is built: a scraping tool baked into Lumen, with room for the scraping tools people already use, and agents at scale, many of them browsing at once.

Later, and only if they earn their memory: Servo for light sites, a local AI model reading the page through Ollama, and an optional PDF editor that starts only when asked.

Limits

- Windows only. WebView2 is the engine.
- No Chrome or Edge extensions: userscripts cover most of what people install them for, and ad blocking, dark pages, passwords through KeePass and translation are built in. Anything else is not there.
- Early. Built in a week by one person and Claude, with AI workers writing much of the code and every change reviewed before it landed. Expect rough edges.

The rule does not change: if a feature costs memory while you are not using it, it had better be worth it.